

TRUFROST & BUTLER

USER MANUAL

**CONVEYORISED HOT AIR GAS
PIZZA OVENS:
Gusto 520G (Window)**



Table of Contents

Section 1: Description and Specifications

Section 2: Installation

Section 3: Operation

Section 4: Maintenance

Section 5: Trouble Shooting Section

6: Major Parts Listing

Section 7: Electrical Wiring Diagram

Precautions:

1. The operator of the oven should be familiar with the functions and operation of the oven. This manual must be kept in a prominent, easily reachable location near the oven.
2. For your safety, do not place inflammables and explosives adjacent to oven.
3. Improper installation, adjustment, alteration, service or maintenance can cause property damage, injury or death. Read the installation, operating and maintenance Instructions thoroughly before installing, operating or servicing this equipment.
4. User is not recommended to disassemble oven arbitrarily. It may cause product malfunction. If you find oven is not operating normally, please consult local distributor for assistance,
5. Please stop operating machine if you hear abnormal noise or oven is shaking.
6. Please keep your hand dry before you pull off the power plug.
7. Please shut off main power switch if you want to connect or remove power plug.
8. Electrical connection must be done by a qualified and licensed electrician.
9. Under age or untrained person cannot operate the oven.
10. Do not attempt to open the Control Box and repair components by oven operator. Contact Trufrost/Butler authorized local distributor for service.


Section 1: Description and Specifications

Butler Gusto ovens may be used as a single unit or stacked one upon another for use as double or triple ovens. A single oven may be mounted on a table or optional stand with casters. When double or triple ovens are stacked, the lowest oven may be mounted on a stand. In case of double or triple ovens, each oven operates completely independent of one another. They use identical controls and components. One can be serviced while the other is operating.



FEATURES:

- Lowest utility cost
- Available in LPG or PNG. The factory setting is for LPG.
- Maintaining consistent temperature for top pizza quality
- Safe in operation
- Can be durable for 8-10 years

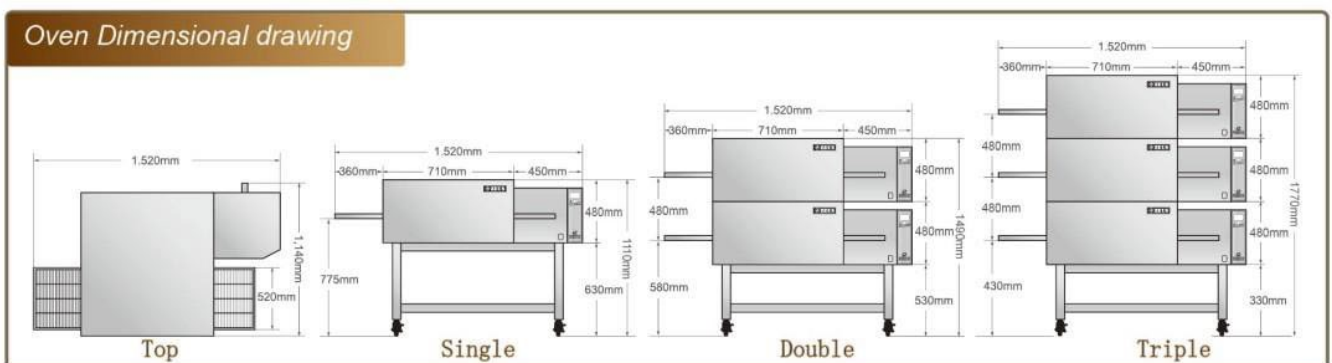

Specification:

Electricity: 220V, 50/60 HZ, 300 Watts

Gas consumption: LPG 0.42 m³/h, PNG 0.95 m³/h

Conveyor belt width: 520 mm

Heating zone (heating chamber) length: 710 mm

Oven dimension: 1520 mm x 1140mm x 480mm

Packing dimension: # 1 box 1230 mm x 1170 mm x 620 mm

2 box 1485 mm x 585mm x 80mm

(single oven without stand)

Net weight of single oven: 160 kg

Shipping weight: 190 kg

Maximum operating temperature: 300°C (230°C is recommended)

Warm up time: 6-8 minutes

Baking time: 5 – 6 minutes at 230°C

Section 2: Installation**1. Unpacking**

Your Butler Gusto oven is shipped partially unassembled and will arrive in a plywood box on a pallet.

The box contains the following components. Check contents thoroughly before assembly.

1 box

- a) Oven body
- b) 2 conveyor end stops
- c) Spare parts
- d) Operational Manual # 2 box
- a) Conveyor assembly with conveyor belt wire
- b) 2 crumb pans

2. Conveyor assembly Installation: must place oven on a flat surface

- a) Insert conveyor assembly from the right side (control box side) while tilting conveyor slightly to the left. (Fig. 1)
- b) Push conveyor all the way to the end in a flat position and insert conveyor side shaft to motor shaft while pressing motor shaft with finger or screwdriver. (Fig. 2 & 3) Open the front panel and make sure that conveyor and heating panel is in place.
- c) Once conveyor is completely installed, insert crumb pans under both sides of conveyors.
- d) Install 2 conveyor end stops to both ends of conveyor.



(Fig. 1)



(Fig. 2)



(Fig. 3)

3. Electrical connection (Fig. 4 & 5)

220V: requires minimum 60A dedicated circuit

Connect supplied power cord to electric socket in the rear of the oven.



(Fig. 4)



(Fig. 5)

4. Gas line connection (Fig. 6 & 7)

a) LPG (Liquified Propane Gas)

Connect LPG container line to gas tube connection in the rear of the oven.


(Standard gas pressure 2.8 Kpa)

B PNG (Piped Natural Gas)

Connect natural gas line directly to gas line connection in the rear of the oven. There is no need for an additional valve. (standard pressure 2.0 Kpa, range: 1.0-2.5 Kpa)



(Fig. 6)

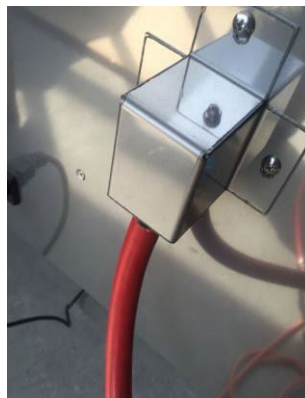

(Fig. 7)

Section 3: Operation

1. Initial Startup (Fig. 8)
 - a) Turn on the Power switch. The power switch will lit. The control panel will show TEMP 0 degree C, SPEED 05:00 and C. You do not need to turn off power switch during business hours.
 - b) Starting the Oven/Control panel operation
 1. Press START/STOP button to start the oven. . LCD will also show P, I, M, C, RUN. P signifies that pilot valve is ON, I: ignitor transformer is ON, M: main valve is ON and temperature is rising. C: conveyor is running, and RUN: oven is running.
 2. To stop the oven, press START/STOP button again.
2. Temperature setting: Be sure that oven is not running.
 - a) Press red TEMP button. TEMP on the LCD window will blink.
 - b) Factory preset temperature is 230 degree C. Minimum temperature is 50 degree C and maximum 300 degree C. (maximum temperature can be changed to 400 degree C upon request at time of order). When temperature reaches 230 degree C, you will hear beep sound and red light will blink.
The red light will remain lit while the oven is running.
 - c) After temperature reaches factory set 230 degree C, to raise temperature, press UP button and to lower temperature, press DOWN button. The temperature will change by an increment of 1 degree C.
 - d) After you set to desired temperature press TEMP button again.
 - e) To confirm desired temperature press TEMP button again.



(Fig. 8)

3. Speed setting: Be sure that oven is not running.
 - a) Press red SPEED button. SPEED will blink on the LCD window.
 - b) Factory preset speed is 5 minutes (05:00). The speed represents pizza baking time. (from when frond edge of pizza pan is entering baking chamber to when pizza pan front edge is out of baking chamber) Minimum speed is 1

minute and maximum 20 minutes. (Factory recommended speed is 4.5-5 minutes)

- c) To raise speed, press UP button and to lower speed, press DOWN button. The speed will change by an increment of 2 seconds.
- d) After you set desired speed press SPEED button again.
- e) To confirm desired speed, press SPEED button again.

4. STAND BY mode: In STAND BY mode you can save 2/3 of energy.

- 1.) Press STAND BY button while the oven is not used. Oven will be in STAND BY mode. The LCD will show P, S, T, I, C, RUN. P means that pilot valve is on, ST means that oven is in stand-by mode, I means that ignitor transformer is on and C means that conveyor is running. If you want to run the oven again, press STAND BY. **DO NOT press START.** Oven will not operate properly.

5. Adjusting baking time and results

Factory preset temperature is 230 degree C and speed of 5 minutes. For the best baking results, you may adjust temperature and speed depending on pizza dough thickness and other conditions. Test results at various temperature and speed for the best pizza taste. We recommend that:

- a) At factory preset speed of 5 minutes, raise or lower temperature by 10 degree C. If you do not obtain satisfactory results by adjusting temperature only, you may adjust speed at the same time. You choose right speed and and temperature for your pizza.
- b) You may adjust speed higher than 5 if you'd like to bake quicker at busy hours.

Section 4: Maintenance

1. Daily Maintenance

- a) Oven exterior
Everyday, you should clean the outside of the oven with soft cloth and mild detergent.
- b) Cooling Fan (Fig.9 & 10)
 1. One cooling fan grille at the rear of each oven control compartment must be cleaned daily. Clean grille with a stiff nylon type brush.



(Fig. 9)



(Fig.10)

2. Check air intake of the cooling fan daily. The best time to check is right after starting the oven.

- c) Conveyor Belts
Everyday stand at the unloading end of the conveyor, and with a brush, simply wipe off any excess crumbs so they fall down into crumb pans.
- d) Crumb Pans
Remove and clean crumb pans at both ends of the oven. Crumb pans can be removed by sliding out to your direction.

2. Monthly Maintenance

- a) The oven interior may require cleaning more than once a month depending on the volume of baking. To clean interior, you have to disassemble some parts of the oven.
- b) Do not use excessive water or saturation of oven insulation will occur. Do not use caustic oven cleaner.
When cleaning your oven, first remove all heavy debris with a vacuum cleaner. Use a damp cloth for light cleaning. For heavier cleaning of baked on grease carbon deposits use a non-caustic cleaner.
- c) Cleaning Conveyor Belts
Removing Conveyor from Oven for cleaning
 1. Remove crumb pans on both ends first
 2. Remove Conveyor end stops on both ends of Conveyor
 3. Remove Conveyor out of the oven in the opposite way of Installation as instructed in Section 2 -2 Conveyor assembly installation.
 4. Remove wire belts and clean with a caustic cleaner.
- d) Cleaning heat plate assembly (air finger)
First, open front panel by unlocking latch on the right side of front panel. There are two (2) heat plates inside the oven. One below conveyor and another one above conveyor.
 - a. Removing upper plate
Using both hands with one hand supporting the plate bottom and another hand pulling out. Do not use excessive power when pulling out.
 - b. Removing lower plate
Grab the handle and pull out slowly.
 - c. Cleaning heat plates
Plates can be cleaned by either soaking in a hot, strong detergent Solution or using a caustic cleaner.
 - d. Replacing the heat plates
Lower plate: In a flat position, push in all the way to the end using the handle . Make sure the front end must align left corner.
Upper plate: While supporting plate bottom with one hand push in with another hand all the way to the end. Push down the plate in place.

3. Maintenance every 3 months

Major electrical and mechanical components may be cleaned or serviced by a Trufrost/Butler authorized local distributor when necessary.

Section 5: Trouble Shooting

1. Control box LCD ERROR message
 - a) ERROR 1
Gas is not feeding or igniting system is not working properly.
 - b) ERROR 2 not used
 - c) ERROR 3
Temperature sensor error.
 - d) ERROR 4
When set temperature does not reach 30 degree C below of actual temperature.
 - e) ERROR 5
When LCD temperature does not reach 50 degree C in 5 minutes, ERROR 5 message will appear.
 - f) ERROR 6
When pilot is not detected for more than 4 seconds while oven is running
2. Power switch does not come on
 - a) Check if power cord is connected to electric socket in the rear of the oven. (Fig.11)
 - b) Fuse is blown out. (if fuse is blown out, use spare fuse in the control box as Shown. (Fig. 12 & 13)



(Fig.11)

(Fig. 12)


(Fig. 13)

3. Temperature is going up slowly.
Temperature probe sensor is not working properly. Need replacement.

4. Power switch is tripped to OFF.
 - Input electricity amperage is not big enough
 - Neutral line is not feeding from main breaker but shares with other appliances, or may be damaged
 - Heating Element is affected with moisture.
5. Power switch is lit but LCD is off
 - Fuse on Main PCB is blown out (Fig. 14)
 - Main PCB failure
 - Transformer failure. (Fig. 15)



(Fig. 14)

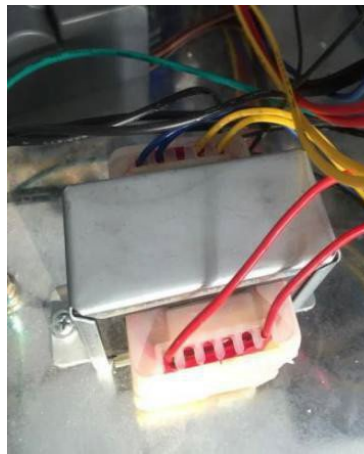


(Fig. 15)

6. Oven does not ignite.
 - 1.) LPG or PNG valve is not open.
 - 2.) No Gas is supplied to oven
 - 3.) Either gas valve is broken down or Gas pressure is over standard pressure.
 - 4.) Control box fan is broken down. (if it takes excessive time to ignite the oven, it can be control box fan problem. (Fig. 16)
Press START to see whether the fan is running. While the oven is running, put your hand or a piece of paper at the fan to feel whether there is a little air coming out from the fan. If you do not feel air, the fan is broken down.
 - 5.) Control box fan air vent opening is not wide enough.
Increase temperature over 200 degree C and then press STAND BY, temperature will be reducing. Watch oval red light between STAND-BY and START/STOP button or another small red light on the main board in the control box.
Adjust air vent opening until red light stays lit, not blinking.
 - 6.) Ground wire is not connected properly. Make sure ground wire is connected to grounding screw in the control box. (Fig. 17)



(Fig. 16)

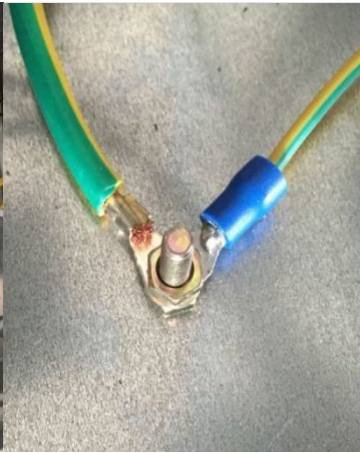


(Fig. 17)

Section 6: Major Spare Parts Listing

PART DESCRIPTION	PHOTO	PART NUMBER
CONTROL BOARD (PCB & PROGRAM)		520G-0101
GAS VALVE ASSEMBLY (SOLENOID VALVE+REGULATOR)		520G-0102
IGNITOR TRANSFORMER		520G-0103
BLUE FAN MOTOR		520G-0104
BLOWER MOTOR		520G-0105
BLOWER MOTOR CONDENSER		520G-0106
CONVEYOR DRIVE MOTOR		520G-0107
TEMPERATURE LIMIT SWITCH		520G-0108
TRANSFORMER		520G-0109

TEMPERATURE PROBE SENSOR		520G-0110
BLOWER MOTOR TEMPERATURE SENSOR		520G-0111-A
CONTROL BOX COOLING FAN		520G-0111-B
ON/OFF POWER SWITCH		520G-0112
CONTROL BOARD FACE PLATE		520G-0113
FRONT PANEL DOOR HINGE & LATCH SET		520G-0114
CONVEYOR		520G-0115
CONVEYOR BELT WIRE		520G-0116
MAIN FUSE		520G-0117
FIRE INDUCTION HOOK		520G-0118
METAL FAN		520G-0119
BLOWER MOTOR RETAINING CLIP		520G-0120
POWER CORD SOCKET		520G-0121
POWER CORD		520G-0122
CONVEYOR DRIVE SPROCKET (16/SET)		520G-0123
CONVEYOR TEFLON SPACER (4/SET)		520G-0124
CONVEYOR TENSION SCREW (2/SET)		520G-0125

Section 7: Electrical Wiring Diagram

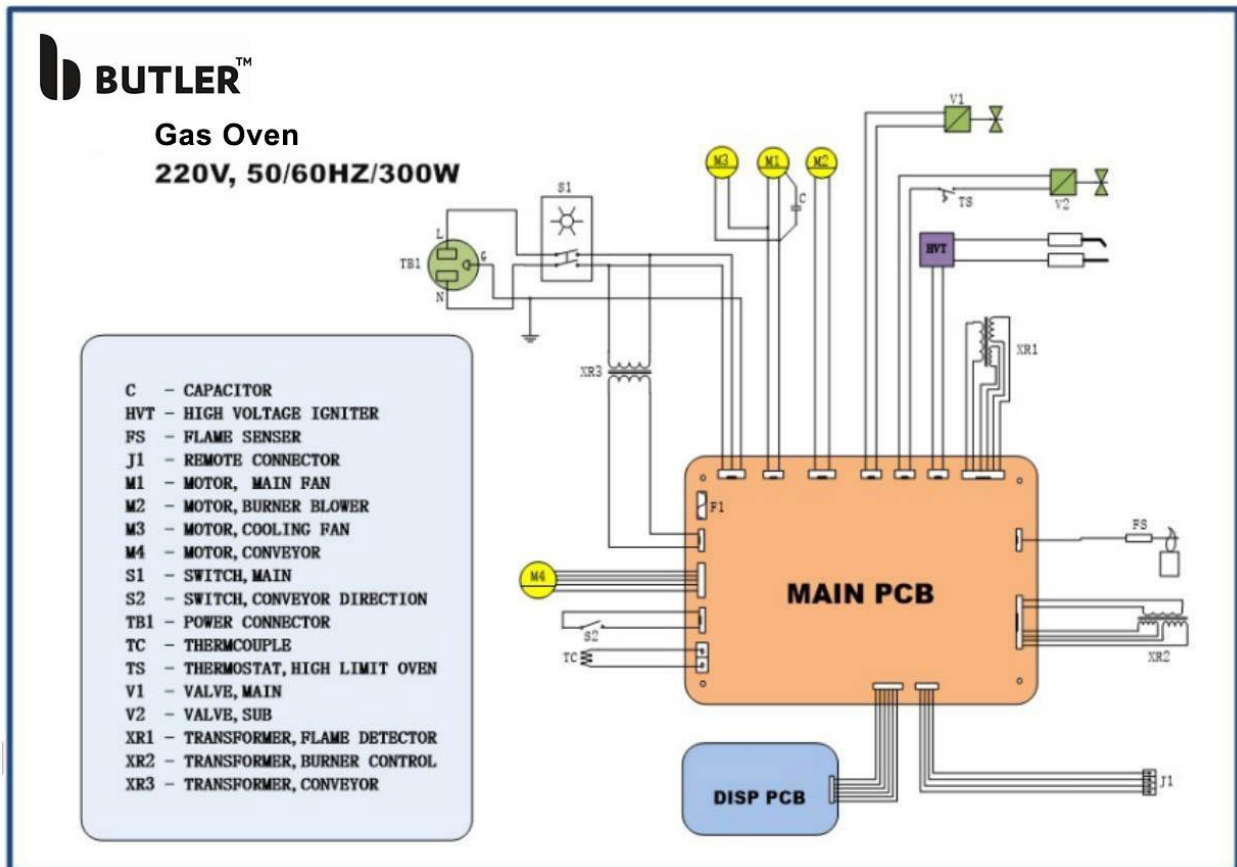

For Service/Parts or Information: Contact your local Trufrost / Butler authorized distributor

Marketed globally by:

TRUFROST AND BUTLER PRIVATE LIMITED

1215, 12th Floor, Tower B, Emaar Digital Greens, Golf Course Extn. Road, Sector 61, Gurugram – 122011

T. +91-7303766166 info@trufrost.com

www.trufrost.com